
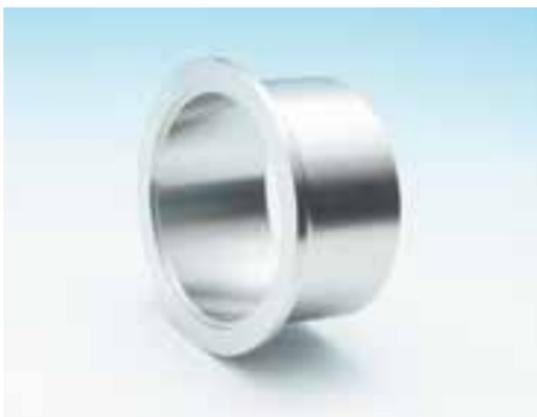


溶接ロングフェルール (Oリングタイプ)

TSG-FWFL・TSG-FWML

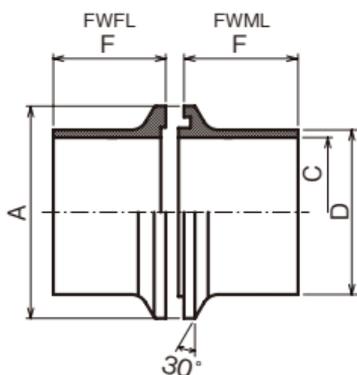

上記の写真はFWFLです。

呼び径		寸法				開先形状	参考重量(kg) FWFL/FWML
(A)	(B)	A	C	D	F		
10	$\frac{3}{8}$	32	14.0	17.3	50	Plane end	0.05/0.05
15	$\frac{1}{2}$	36	17.5	21.7			0.08/0.08
20	$\frac{3}{4}$	42	23.0	27.2			0.10/0.10
25	1	50	28.4	34.0			0.15/0.15
32	$1\frac{1}{4}$	58	37.1	42.7			0.18/0.18
40	$1\frac{1}{2}$	65	43.0	48.6			0.23/0.23
50	2	78	54.9	60.5			0.32/0.32
65	$2\frac{1}{2}$	94	70.3	76.3			0.41/0.41
80	3	107	83.1	89.1			0.49/0.48
90	$3\frac{1}{2}$	119	95.6	101.6			0.53/0.53
100	4	134	108.3	114.3			0.66/0.69
125	5	159	133.0	139.8			0.92/0.93
150	6	189	158.4	165.2			1.18/1.16
200	8	243	208.3	216.3		1.76/1.80	
250	10	290	259.4	267.4	Bevel end	2.01/2.17	
300	12	344	309.5	318.5		2.89/2.77	

※Cはsch10を標準にしています。